





TOPCAP

TopCap boosters are designed for underground blasting operations or small diameter boreholes. Each booster contains a cap sensitive Pentolite main charge for reliable detonation.

Each TopCap booster includes a det-well sized to accept most commercial detonators. The det-well contains a retention feature to grip the detonator and secure it in place. For added reliability, the base of the det-well protrudes into the Pentolite main charge.

TOPCAP-8 TOPCAP-20

Nominal VOD	>25,000 fps	>25,000 fps
Nominal Detonation Pressure	262 kbars	262 kbars
Nominal Density	1.65 g/cc	1.65 g/cc
Diameter	0.6 inches	0.7 inches
Length	2.12 inches	3.5 inches
NEW	8 gram	20 gram
Formulation	Pentolite	Pentolite
Part Number	FB-TC08	FB-TC20
Box Dimensions	19-1/2" x 11-5/8" x 5-1/4"H	17" x 11-1/4" x 5-1/4"H
Number of Units	640 (64 Strips of 10 ea.)	232 (29 Strips of 8 ea.)
Gross Weight	16 LBS.	16 LBS.

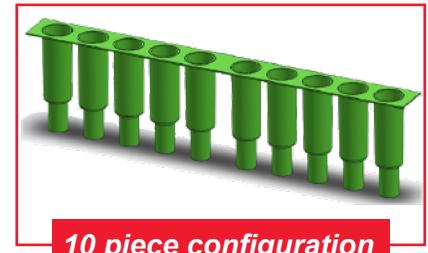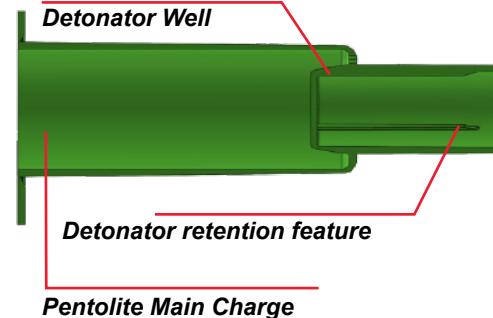

Explosive Classification: UN0042, Boosters, 1.1D

Storage: Store in a cool, well ventilated magazine approved for 1.1D explosives

Ex Number: 201-207-0957

NO WARRANTIES OR LIABILITIES

Accurate Energetic Systems, LLC does not assume any liability whatsoever for the accuracy or completeness of the information contained herein. Although the recommendations stated are based upon tests and the best information available to us, it is expressly understood that we make no guarantee of results, and assume no responsibility or liability in connection with the use of our products. Nothing contained herein shall be construed as an offer to supply a product or to constitute a license, implied or otherwise, to use our product in the infringement of any patent, whether owned by Accurate Energetic Systems, LLC or other.



Tel: 931-729-4207



Email: sales@aesys.biz



Website: www.aesys.biz